


AXIAL FEEDER AF 200/201

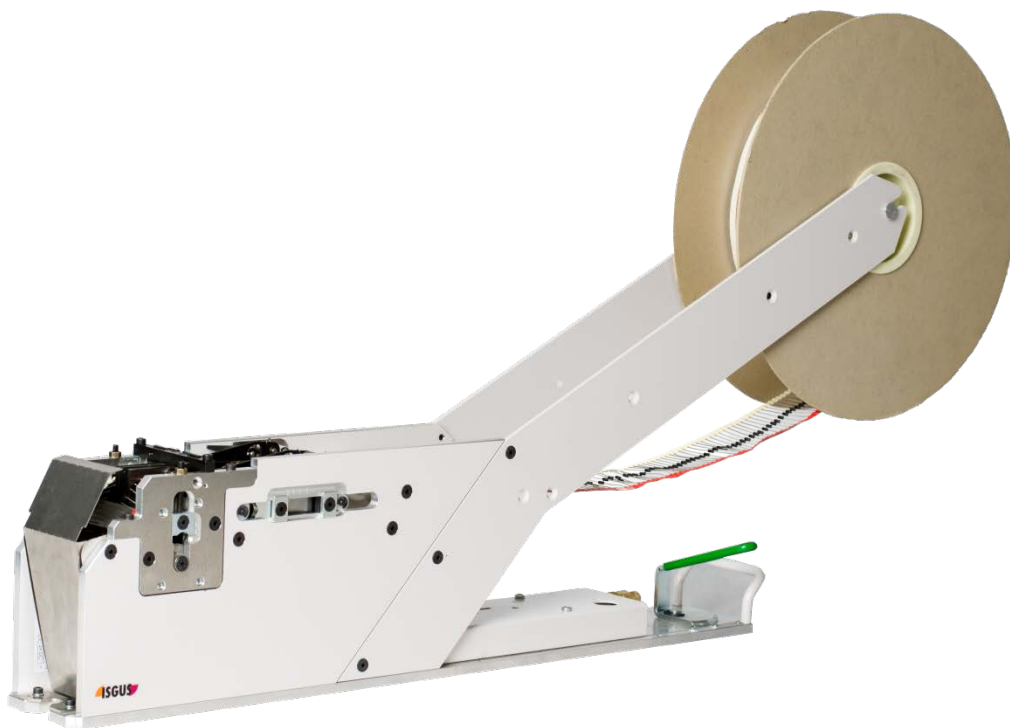

The automated feeding solution for axial components

Axial Feeder AF 200/201

- Automated feeding of Axial components
- Exact alignment of parts
- Easy handling
- PLC integrated
- Quick interchangeability of feeder
- Throughput up to 5000 parts/h

Options

- Sensor for tape end
- Sensoric for part recognition
- Reel axis with break
- Leads not bended
- Ammopack 280x450x70 (124)mm
- Stress free bending
- Pulling cut for more accuracy
- Additional bending station
- Customer options

Mounted tape	Acc. to DIN IEC 60286
Tape width	55 – 65mm (AF 200) 55 – 105mm (AF 201)
Components	capacitors, resistors and diodes with axial connections
Component size	Diameter 1,8 – 19mm Lenth 4,1 – 41 mm
Pitch	7,5 – 45 mm (0,295 – 1,772)
Leads	Diameter 0,4 – 1,4 mm
Feeding rate	ca. 0,7s./component
Component storage	Reels, max. 400 mm Ø
Electrical Power	24V DC/500 mA
Compressed air	6 –7 bar, PK 4
Controller	Integrated in the feeder
Installation fixture	With clamping device
Manual mode	mit Druckschalter

