

PT200

2 mil Polyimide Masking Tape










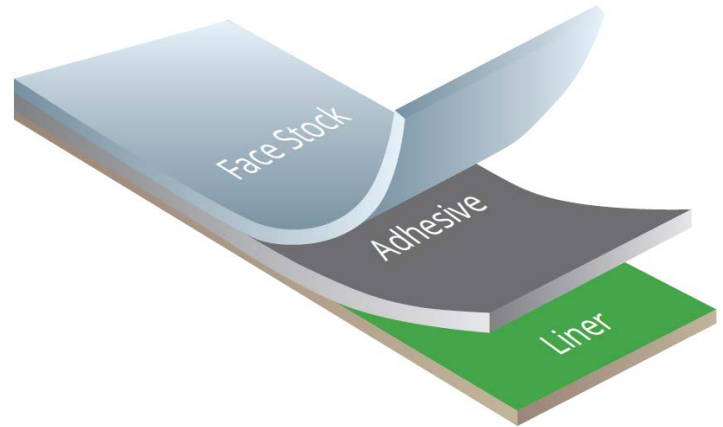


Labels for Life.

Face Stock: 2.0 mil polyimide masking tape offers excellent resistance to heat and chemicals. Specifically designed to protect the surface it is placed on. Ideal for marking gold contacts and other sensitive areas on printed circuit boards. The material conforms to irregular surfaces.

Adhesive: 1.5 mil heavy duty removable silicone adhesive offers resistance to heat and chemicals. It is designed to be cleanly removed from the surface that it is applied to after the manufacturing process.

Liner: 3.0 mil clear polyester liner designed to offer excellent performance.



 <h3>Adhesion</h3> <table border="0"> <tr> <td>Stainless Steel</td> <td>26 oz/in</td> </tr> <tr> <td>Tenile Strength</td> <td>60 lps/in</td> </tr> </table>	Stainless Steel	26 oz/in	Tenile Strength	60 lps/in	 <h3>Material Caliper</h3> <table border="0"> <tr> <td>Face Stock</td> <td>.0020"</td> <td>50.8 μ</td> </tr> <tr> <td>Adhesive</td> <td>.0015"</td> <td>38.1 μ</td> </tr> <tr> <td>Liner Polyester</td> <td>.0030"</td> <td>76.2 μ</td> </tr> <tr> <td>Total Material (kraft)</td> <td>.0065"</td> <td>165.1 μ</td> </tr> </table>	Face Stock	.0020"	50.8 μ	Adhesive	.0015"	38.1 μ	Liner Polyester	.0030"	76.2 μ	Total Material (kraft)	.0065"	165.1 μ	 <h3>Process Durability</h3> <p>Dielectric Strength: 8,500 volts</p> <p>It is recommended that customers test the material in actual application to determine if the material meets all requirements.</p>
Stainless Steel	26 oz/in																	
Tenile Strength	60 lps/in																	
Face Stock	.0020"	50.8 μ																
Adhesive	.0015"	38.1 μ																
Liner Polyester	.0030"	76.2 μ																
Total Material (kraft)	.0065"	165.1 μ																
 <h3>Exterior Durability</h3> <p>Recommended: Indoor use only</p>	 <h3>Temperature Range</h3> <p>Service Temperature: 30 minutes: 500°F (260°C) Minimum Application Temperature: 50°F (10°C) Recommended: Test temperature rating in actual application.</p>	 <h3>Shelf Life</h3> <p>Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH. Shelf Life: 2 years @ recommended storage</p>																
 <h3>Chemical Resistance</h3> <p>Testing can be completed upon customer request</p>	 <h3>Agency Recognitions</h3>	 <h3>Recommended Printing</h3>																

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only. They shall not be relied upon by IDENTCO customers for designs and specifications or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information—revised 06/06/24.

